



## Coletor de Dados Datalogic Falcon X3

Capture códigos de barras explorando as tecnologias 1D a laser e Imager 2D com as versões de alcance padrão e alcance extra longo disponíveis. Conta com uma tela VGA e uma câmera colorida de 3.1 megapixels.



**FALCON X3 Mobile Computer Quick Start Guide**

**THE PACKAGE**

The Falcon X3 package includes the following items:



- A) Falcon X3 mobile computer
- B) Rechargeable battery pack
- C) Blank keypad overlay
- D) Quick Start Guide/ Wavelink Avalanche Insert/ End User License Agreement (EULA) Sheet

**THE TERMINAL**



- A) LEDs
- B) ON/OFF power key
- C) Color display\*
- D) Front scan key
- E) Keypad
- F) Microphone
- G) Stylus
- H) Laser safety label
- I) Product label
- J) Color camera/flash (optional)
- K) Loudspeaker
- L) Reset key (under battery)
- M) MicroSD card slot (under battery)



- N) Data capture window\*
- O) Handylink connector (host/client)

\* Remove protective film cover before use

**KEYPADS**

**Alphanumeric Keyboard**



**Numeric Keyboard**



1. Navigation Keys
  - Up/down arrows with Yellow Modifier adjusts volume
  - Up/down arrows with Blue Modifier adjusts backlight
  - Left with Blue Modifier locks keyboard
  - Right with Blue Modifier acts as MS Start key
2. Scan Key
3. Yellow Modifier
4. Blue Modifier
5. Soft Keys


**GETTING STARTED**

**Insert the Battery**


Insert the battery with the contacts down and the latch toward the device main connector. Then press the battery into the device until the battery latch engages automatically:



**Charge the Battery**

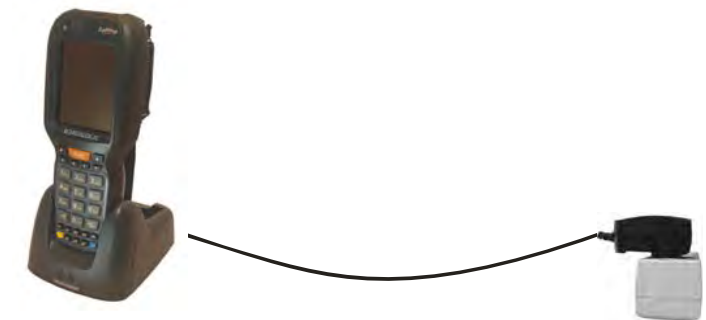

With Single Slot Dock\*



**CAUTION** Do not use the Falcon X3 until batteries are charged for minimum 4 hours.

\* The power supply for the Single Slot Dock is included in the Single Slot Dock box (P/N 94A151125)

## SYNCHRONISE YOUR DEVICE WITH THE PC

Windows Mobile Device Center is only compatible with Windows Vista and Windows 7; if you run Windows XP or earlier, you have to download Microsoft ActiveSync.

You can establish a connection to your Falcon X3 through the following interfaces:

- USB either directly or through the Single Dock
- RS232 either directly or through the Single Dock
- Bluetooth®

To establish a partnership between the Falcon X3 and a host PC, start Windows Mobile® Device Center and follow the steps below:

1. Connect the Falcon X3 to the host PC. Windows Mobile® Device Center configures itself and then opens.
2. On the license agreement screen, click Accept.
3. On the Windows Mobile Device Center's Home screen, click Set up your device.
4. Select the information types that you want to synchronize, then click Next.
5. Enter a device name and click Set Up.


When you finish the setup wizard, Windows Mobile Device Center synchronizes the mobile computer automatically. Microsoft® Office Outlook® emails and other information will appear on your device after synchronization.

## Communicate with Host




## DATA CAPTURE

### Laser Data Capture

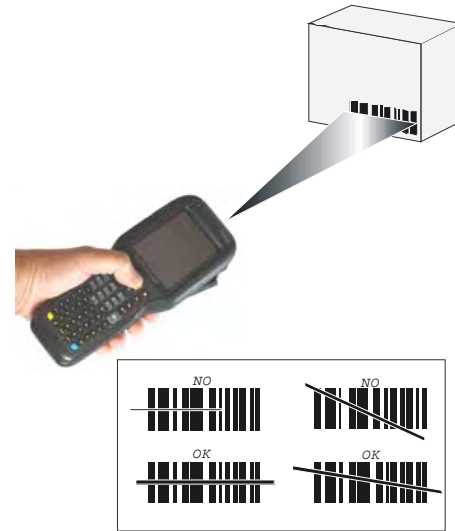

### Imager Data Capture

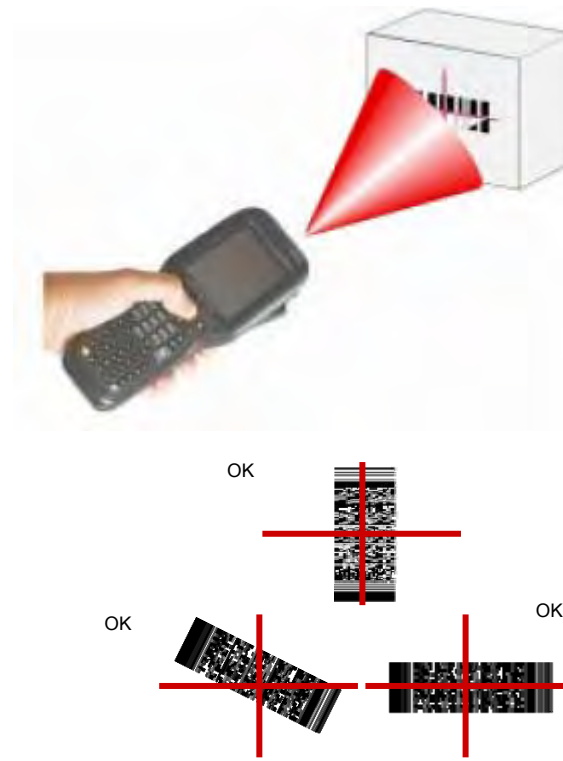

## REFERENCE DOCUMENTATION

For further information regarding Falcon X3 refer to the SDK Help on-line and to the Falcon X3 User's Manual.

For information regarding safety and regulatory refer to the dedicated section of the Falcon X3 User's Manual.

## PATENTS

This product is covered by one or more of the following patents.

Design Pat.: EP 1,180,673; AU 329,643.

US Pat.: 5,198,649; 5,311,000; 5,440,110; 5,481,098; 5,493,108; 5,686,716; 5,992,740; 6,412,698; 6,415,978; 6,454,168; 6,478,224; 6,513,714; 6,561,427; 6,585,157; 6,808,114 B1; 6,997,385 B2; 7,108,170; 7,387,246 B2.

European Pat.: 789,315 B1; 1,128,315 B1; 1,396,811 B1; 1,413,971 B1.

Additional patents pending.

## SERVICE AND SUPPORT

Datalogic provides several services as well as technical support through its website.

Please check our website at [www.datalogic.com](http://www.datalogic.com) under "Support & Services", then "Automatic Data Capture", and click on the links indicated for further information including:

- **Downloads**
- **Manuals** for the latest versions of user manuals and product guides.
- **Software & Utilities** for the latest firmware release for your product. You can also click on the following link for direct access to this section: [www.datalogic.com/products\\_updates](http://www.datalogic.com/products_updates).
- **Service Program** for warranty extensions and maintenance agreements.
- **Repair Centers** for a list of authorised repair centers.
- **Technical Support Automatic Data Capture** email form to contact our technical support.

## WARRANTY TERMS AND CONDITIONS

The warranty period is 1 year for the device and 90 days for consumables (e.g. battery, power supply, cable etc.) from date of purchase at our company.

©2010-2014 Datalogic ADC S.r.l. • ALL RIGHTS RESERVED. • Protected to the fullest extent under U.S. and international laws. • Copying, or altering of this document is prohibited without express written consent from Datalogic ADC S.r.l.

Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U.

Falcon and the Falcon logo are registered trademarks of Datalogic ADC S.r.l. in the U.S.A. and the E.U. All other brand and product names mentioned herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners.