



Nobreak APC Back-UPS 1200VA

O Nobreak APC 1200VA é um produto de ótima qualidade e bom custo benefício. Luminosidade, baixo consumo e grande durabilidade, são as principais características do APC Back UPS 1200VA.



Product End-of-Life Instructions

Product Range: Back-UPS®

Marketing Model/Name: (List of multiple models if applicable)

Back-UPS® - "Tower" Style – BK 200/300/325/475/500/650/1000

Back-UPS® - "Surge" Style – BE 325/350(G)/400/450(G)/500/525/550/600/650(G)(G1)/700

Back-UPS® - BH/BI/BN/BI/BZ 500/650/800/850/1000/1250

Back-UPS® - BR 500/600/650/800/1000/1100/1200/1300/1500

Back-UPS® - BX 550/650/800

This includes country specific designations and 120V, 230V, 100V products

Purpose:

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Note :

This product family is in the scope of EU directive 2002/96/EC, Waste Electrical and Electronic Equipment (WEEE). This product range contains a battery pack that is in the scope of EU directive 2006/66/EC of 26 September 2006 (Battery Directive).




Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy : Reuse → Separation for special treatment → Other dismantling → Shredding.

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

Disassembly Instructions:

1. Remove the battery from the product per the instructions provided. Be careful, the battery may be heavy. The batteries carry an electrical charge that represents a safety hazard that can result in severe injury.
2. Battery Packs are recommended to be shipped to recyclers as whole units.
3. Shear the power cord from the Uninterruptible Power Supply (UPS). Place the power cord into the appropriate recycling waste stream.
4. Disassemble the housing by removing fasteners. Place housing into appropriate recycling waste stream (plastic).
5. Remove the Printed Circuit Board Assembly, Wire Harnesses and Transformer and place into appropriate recycling waste stream.

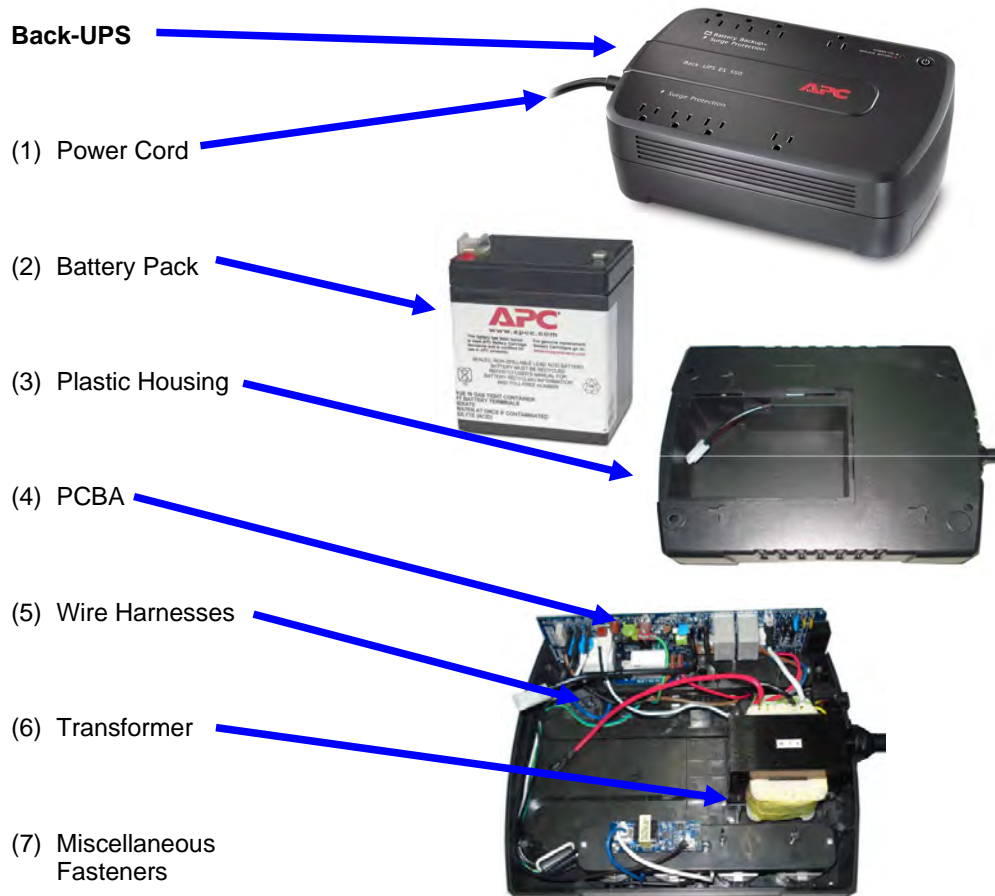

Back-UPS product range consists of the following typical parts: (1) Power Cord, (2) Battery Pack (RBC), (3) Plastic housing parts, (4) Printed Circuit Board Assembly (PCBA), (5) Miscellaneous Wire Harnesses, (6) Transformer, and (7) Miscellaneous Fasteners.

Recommendation	Number on drawing	Components	Weight (Kg)	Comment
Special treatment	(1)	Power Cord	0.15 – 0.55	Power Cords are composed of various gauge copper wires with RoHS compliant PVC wire wrap and plug connectors.
Special treatment	(2)	Sealed Lead acid Batteries	0.675 – 4.50 each	See: RBC, Battery Module, Extended Run Time Battery Module for End of Life Instructions of battery pack. Use authorized battery recycler See: Material Safety Data Sheet Available at www.APC.com Caution: Batteries may contain an electrical charge – avoid creating short across terminals. Caution: Cracked or bloated batteries may be hazardous and represent a lead(Pb) exposure.
Special treatment	(4)	Printed Circuit Board Assembly (lead-free)	0.50 – 2.5 each	Brominated flame retarded (BFR) FR4 laminate with lead free solder (SAC305) and miscellaneous electronic components.
Special treatment	(5)	Wire harnesses	0.05 – 0.15 each	Brominated flame retarded (BFR) nylon moulded connectors.

For more information please go to: <http://www.apc.com/recycle/>

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

APC by Schneider Electric

132 Fairgrounds Road
West Kingston, RI 02892
Phone 800-788-2208

www.APC.com

APC by Schneider Electric has achieved compliance status and the accuracy of data in this document is based on our best knowledge as of the date of its publication.

ENVEOLI111108EN

Publication date : 3 January 2012