



Switch HPE OfficeConnect J9982A

O switch HPE série 1820 oferece mais opção e flexibilidade a organizações menores que exigem simplicidade e custo total de propriedade (TCO) menor, enquanto apresenta melhor desempenho de rede.



J9982A Datasheet

Get a Quote

Overview

HPE OfficeConnect 1820 Series switches are basic Gigabit web managed "smart" Layer 2 switches supporting Virtual LANs (VLANs) and Link Aggregation, designed for small businesses looking for key features in an easy to administer solution. This J9982A has 8 x 10/100/1000 ports, four of which support Power over Ethernet PoE+/PoE with a power budget of 65W. Part of the OfficeConnect portfolio of small business networking products from Hewlett Packard Enterprise.

Quick Spec

Figure 1 shows the appearance of HPE J9982A.

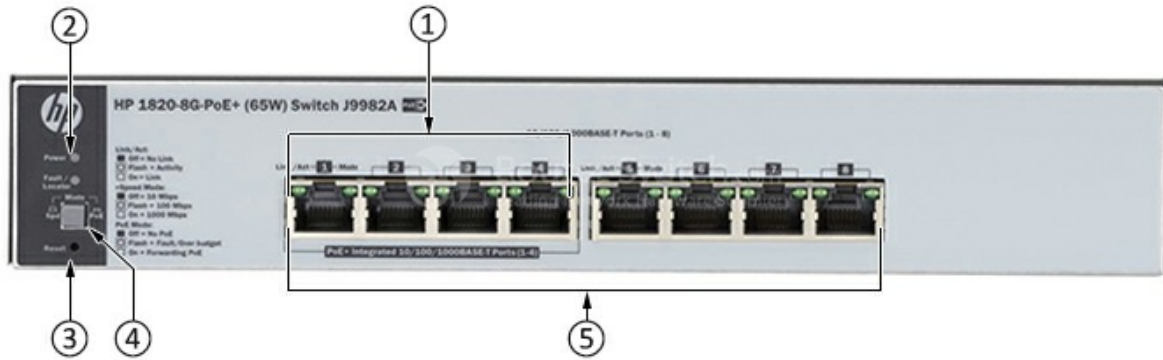


Table 1 shows the quick spec.

Product Code	J9982A
Type	HPE 1820-8G-PoE+ (65W) Switch
Ports	· 4 RJ-45 autosensing 10/100/1000 PoE+ ports; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
Throughput:	Up to 11.9 Mp/s (64-byte packets)
Switching capacity	16 Gb/s
PoE capability	65W
Minimum dimensions (W x D x H)	25.4 x 15.95 x 4.39 cm (10 x 6.28 x 1.73 in) (1U height)
Weight	0.91 kg (2.01 lb)

Product Details

Figure 2 shows the front panel of HPE J9982A.



Note:

(1)	PoE+ ports 1-4
(2)	Power and Fault/Locator LEDs
(3)	Mode button
(4)	Reset button
(5)	8 x 10/100/1000BASE-T RJ-45 ports

Compare to Similar Items

Table 2 shows the comparison.

Product Code	J9979A	J9982A	J9980A
Type	HPE 1820-8G Switch	HPE 1820-8G-PoE+ (65W) Switch	HPE 1820-24G Switch
Ports	8 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only	<ul style="list-style-type: none"> 4 RJ-45 autosensing 10/100/1000 PoE+ ports; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 4 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 	<ul style="list-style-type: none"> 24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only 2 SFP 100/1000 Mbps ports (IEEE 802.3z Type 1000BASE-X, IEEE 802.3u Type 100BASE-FX) Supports a maximum of 24 autosensing 10/100/1000 ports plus 2 SFP ports
Switching capacity	16 Gb/s	16 Gb/s	52 Gb/s
PoE capability	N/A	65W	N/A

Get more information

Do you have any question about the J9982A?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

J9982A Specifications

Type	HPE 1820-8G-PoE+ (65W) Switch
Physical Specifications	
Dimensions (W x D x H)	25.4 x 15.95 x 4.39 cm (10 x 6.28 x 1.73 in) (1U height)
Weight	0.91 kg (2.01 lb)
Technical Specifications	
I/O ports and slots	· 4 RJ-45 autosensing 10/100/1000 PoE+ ports; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only · 4 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only
Memory and processor	ARM Cortex-A9 @ 400 MHz, 128MB SDRAM; Packet buffer size: 1.5MB, 16MB flash
Performance	100 Mb Latency: <7 μ s (LIFO 64-byte packets) 1000 Mb Latency: <2.3 μ s (LIFO 64-byte packets) Throughput: Up to 11.9 Mp/s (64-byte packets) Switching capacity: 16 Gb/s MAC address table size: 8000 entries
Reliability	MTBF (years): 112.36
Management	Web browser
Environmental Specifications	
Operating temperature	0° to 40°C (32° to 104°F)
Operating relative humidity	15% to 95% @ 40°C (104°F)
Nonoperating/Storage temperature	-40° to 70°C (-40° to 158°F)
Nonoperating/Storage relative humidity	15% to 95% @ 60°C (140°F)
Altitude	Up to 3 km (9,842 ft)
Acoustic	Power: 0 dB no fan
Electrical Specifications	
Frequency	50/60 Hz
Voltage	100-240 V ac, rated (depending on power supply chosen)
Current	0.9 A
Maximum power rating	83.9 W
Idle power	12.6 W
PoE power	65 W PoE+
Safety Certifications	
Safety	UL 60950-1; EN 60825; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1
Emissions	FCC Class A; EN 55022/CISPR-22 Class A; VCCI Class A F

Immunity	Generic: EN 55024, CISPR 24 EN: EN 55024, CISPR 24 ESD: IEC 61000-4-2 Radiated: IEC 61000-4-3 EFT/Burst: IEC 61000-4-4 Surge: IEC 61000-4-5 Conducted: IEC 61000-4-6 Power frequency magnetic field: IEC 61000-4-8 Voltage dips and interruptions: IEC 61000-4-11 Harmonics: EN 61000-3-2, IEC 61000-3-2 Flicker: EN 61000-3-3, IEC 61000-3-3
Standard and protocols	
Denial of service protection	CPU DoS Protection
General protocols	IEEE 802.1D Spanning Tree Protocol IEEE 802.1p Priority IEEE 802.1Q VLANs IEEE 802.1W Rapid Spanning Tree Protocol IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.3x Flow Control RFC 1534 DHCP/BOOTP Interoperation RFC 2030 Simple Network Time Protocol (SNTP) v4
Network management	IEEE 802.1AB Link Layer Discovery Protocol (LLDP)

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



16,000+

Customers Trusted



200+

Countries we Sold



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com